

WT-M1650 1650KVA/1320KW Technical Data sheet



Professional Genset Manufacture On Your Side
FUZHOU WINTPOWER TECHNOLOGY CO., LTD.

DIESEL GENERATOR

Powered by Mitsubishi Engine

STANDARD SPECIFICATION

Three phase four wire, output voltage 400V/230V, 50HZ, between 0.8 lagging, protection capability according with the standard of NAME1 and IP23.

General Features:

- Δ Composed of **Mitsubishi** diesel engine and **Leroy somer** alternator
- Δ Oil and fuel filter fitted, water separator
- Δ Lube-oil drain valve fitted
- Δ Electric Starter Charge motor 24 V.D.C
- Δ Water-cooled
- Δ 8-hours operation base tank
- Δ Auto start
- Δ Optional soundproof and weatherproof canopy
- Δ 3 pole MCCB Delixi breaker/Optional ABB
- Δ Operation & Maintenance manual
- Δ Special Integrated Steel Base tank and sprayed overall in gloss enamel paint

Voltage Regulation

- Voltage regulation maintained within $\pm 0.5\%$
- Between 0.8 and 1.0 lagging and unity
- From no load to full load
- At speed droop variation upto 4.5%

Frequency Adjustable Ratio


- Change load from 0-100%, within 1.0% (electric speed regulator), within 4.5% (mechanical speed regulator)

Frequency Undulation

- load from 0-100%, frequency undulation within 0.25%
- No load wire volts max undulation ration\ within 1.8%
- Three Phase balanced load in the order of 5%

Effect factor of Telecom

- TIF better than 50
- THF to IEC60034 Part 40 better than 2%

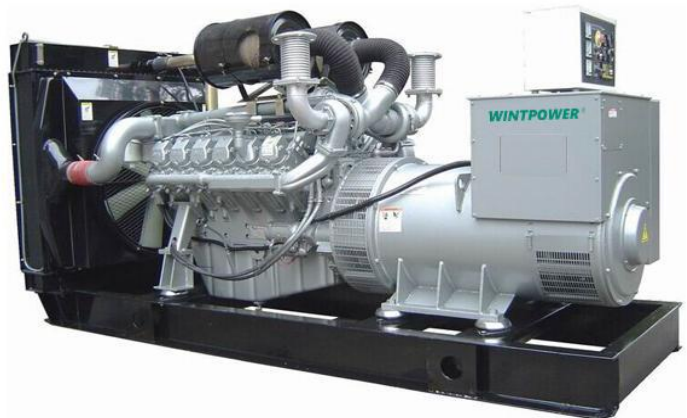

50HZ, 1500RPM, 3-PHASE, 400/230V

Gensets model	Power output(KVA)		Power output (KW)		Cummins Engine Model	Leroy somer Alternator
	PRP	ESP	PRP	ESP		
WT-M1650	1500	1650	1200	1320	S12R-PTAA2-C	LSA50.2L8

Note:

- (1) Available in the following voltages: 220V-240V AND 380V-415V(440V)-50HZ
- (2) PRP: Prime Power-Continuous duty operation, under variable load 24/24-h-10% overload permissible 1 hour/12hours.
- (3) Rating Definitions (Operation at Altitude $\leq 1000m$, Ambient temperature $\leq 40^{\circ}C$) Continuous Power. These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Engine & Alternator

ENGINE--Industrial 4 stroke cooled diesel engine complete with air,fuel and oil filters,electric starting and charging equipment,engine protection against low water level.

ALTERNATOR--Brushless,self exciting,self regulation,sreen protected,drip proof rated in accordance with IEC60034.Voltage regulation maintained within $\pm 0.5\%$ from no load to full load.between 0.8 lagging and unity.All standard voltages available.

COOLING--Radiator and colling fan complete with protection guards,designed to cool engine at specified output in air temperatures upto 45°C ,radiators suitable for higher temperatures are available.Low water level protection fitted as standard.

ELECTRICAL SYSTEM--24V upto.Axial type starter motor,battery charging alternator,high capacity lead acid battery,and battery tray mounted on the generator base frame,and heavy duty interconnecting cable with terminations.

EXHAUST SYSTEM--Heavy duty industrial exhaust silencer with flexible piping.

Technical Data Sheet

Generating sets model:

400/230V,50Hz,1500 rpm

Engine Model:	Mitsubishi S12R-PTAA2-C
Type	12-Vcylinder,4 cycle diesel
Aspiration	Turbocharged inter-cooled
Bore/Stroke	mm 170X180
Compress the ratio	13.5: 1
Cooling system	Water-cooled
100% Load Fuel Consumption	g/kwh 221
Engine Speed/Frequency	RPM/Hz 1500/50HZ
Rated Output	kw/bHP 1277/1712
Exhaust air flow	(m3/min) 118
Coolant Capacity	L 125
Starting System	Electric 24 volt DC
Displacement	L 49.03
Lubricant system Capacity	L 180
Battery Volatge / Capacity	24VDC
Governing Type	Electrical (GAC governor)
Exhaust Gas Temperature	$^{\circ}\text{C}$ 98
Exhaust Gas flow	m3/min 312
Noise level	dba@7m $\leq 80\text{dba}(\text{canopy type})$

Genset Option Features

- Δ Low fuel level alarm shutdown
- Δ Automatic Fuel Filling System
- Δ Engine oil feeding and drain pump
- Δ Auto Transfer Switch(ATS)
- Δ Parallel control panels
- Δ Circuit Breaker MCCB & ACB
- Δ Remote Control Panel
- Δ weatherproof/soundproof Canopy

Δ Trailer type Gensets

QUALITY STANDARDS

- ISO9001:2016,ISO14001,ISO3046
- ISO8528 BS4999
- BS5514,AS1359,ICE34
- CE Compliance

Gensets Dimensions & Weight

- Open type: L*W*H,mm
4595*2156*2700
- Silent type(option) L*W*H,mm
40HQ Container

Alternator Technical data

Leroy somer

- Δ Bruxhless,self exciting
- Δ class "H" insulation
- Δ Standard degree of protection is IP23
- Δ self regulating
- Δ With fan cooling
- Δ Resist Humid grease
- Δ AC excitation,roating rectification tube
- Δ Stator grease insulation covered
- Δ Rotator and exciation high polymer,Resist the corruption of oil and acid
- Δ Rotator ballance is in accordance with BS5625 standard 12.5
- Δ High-quality lubrication sealed long-time bearing
- Δ Rotator silikon steel close tight

Exciter	Brushless
Cooling Fan	Cast alloy aluminum
Bearing	Single,double shielded
Windings	100% copper
Connection Type	Reconnectable
Insulation Type	Class H
Pitch	2/3
Amortisseur Winding	Full
Voltage Regulator	AVR R450
Voltage Regulator NL-FL	$\pm 0.5\%$
Underspeed Protection	Standard
Overexcitation Protection	IP23
TIF (1960 Weightings)	<50
Exciation System	AREP

Control Panel -Comap

The base mounted control panel in a vibration isolated sheet steel enclosure. The control panel is equipped as follows:

- a) Instruments: Analogue Voltmeter, Hours Run Meter, Water pressure Meter.
- b) Controls: Emergency Stop Pushbutton, Voltmeter Phase Selector Switch.
- c) Control module: Standard collocation is Comap AMF20 with AMF.



Control module Comap AMF 20

Main Features:

- Δ Automatic or manual start/stop of the genset
- Δ 3 phase AMF function
- Δ configuration analog inputs
- Δ Configurable programmable binary inputs and outputs
- Δ Warm-up and cooling functions
- Δ Battery voltage, engine speed measurement
- Δ Modem communication support (IL-AMF25 only)
- Δ RS232 interface
- Δ Support of engines equipped with Electronic Control Unit (J1939 interface)
- Δ Graphic back-lit LCD display
- Δ Comprehensive diagnostic messages; SPN/FMI codes; KWP2000 Support
- Δ 6 LED indicators
- Δ Sealed to IP65
- Δ Generator C.B and Mains C.B control with feedback and return timer
- Δ AMF Function

Sound Attenuated Enclosure/Synchronizing Panel and ATS-Optional

Robust Corrosion Resistant Construction

- Δ black finish stainless steel lock and hinges
- Δ body made from steel components treated with polyester powder coating

Synchronizing System

- Δ each unit generator will be equipped
- Δ international standard GAC Cabinet
- Δ adopt original ComAp Controller IC-NT
- Δ busbar included inside panel
- Δ all the necessary accessories included

Excellent Access for Maintenance

- Δ two large doors on each side
- Δ radiator fill access plate
- Δ lube oil and cooling water drains pipe to exterior of the enclosure

ATS (automatic transfer switch) system-optional

- Δ Complete handy and auto switch of city power and inside power.
- Δ Display current, voltage of city power and inside power.
- Δ auto mode or manual mode function combined



Δ All the necessary accessories included

Security and Safety

Δ control panel viewing window in a lockable access door

Δ emergency stop push button mounted on enclosure

Δ cooling fan and battery charging alternator fully

Δ exhaust silencing system totally enclosed for operator safety

Separated Fuel Tank inside Container and Accessories

Δ capacity designed for 12 hours running.

Δ at least 2mm thickness 100% steel adopted.

Δ twice welding inside and outside of all the welding line

Δ each fuel tank being tested against oil leakage on

Δ each fuel tank with our factory series number

Δ fuel tank with necessary drain outlet

Δ fuel tank with necessary fuel in and back outlet



ATS (automatic transfer switch) system -optional



WINTPOWER, reserves the right to modify the characteristics of its product at any time in order to incorporate the latest technological developments. The information contained in this document may therefore be changed without notice. For more technical data, contact sales@wintpower.com

Manufacture: FUZHOU WINTPOWER TECHNOLOGY CO., LTD.